

TOP CHORD LOAD TO ALL POINTS

MUST BE VERTICAL ONLY. THE LOADS ARE LIMITED DUE TO THE ROOFS ABILITY TO SUPPORT BRIDLED LOADS AT THE TOP. BRIDLE TO 45° MAX. TYPE. CHORDS AT EACH PANEL POINT.

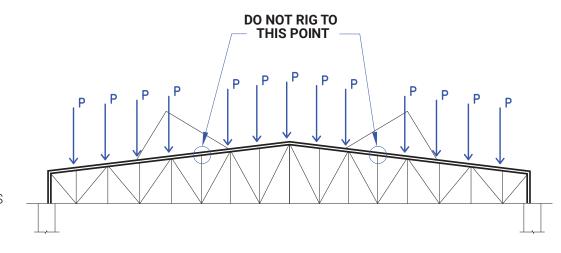

NO SNOW

APPLIED LOAD: P=3,500 LBS

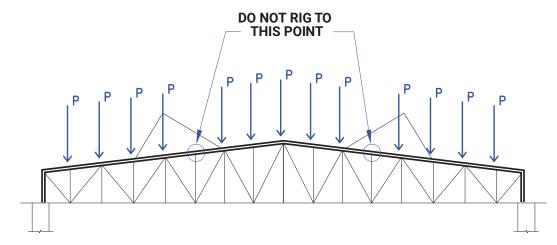

PARTIAL SNOW
APPLIED LOAD: P=2,200 LBS

